

# KINE-SPIN / BARRETT


## PAN HANDLER SYSTEM

### Centrifuge loading & unloading system

- Speeds pan handling in & out of centrifuge
- Reduces operator effort
- Mounted on machine with floor support
- Fits existing Kine-Spin centrifuges
- Uses standard pan dollies
- Compact with small footprint
- Simple installation for existing machines
- Uses standard 110 volt electric hoist
- Eliminates need for overhead crane
- A low cost process improvement



System shown with dryer unit and pan on standard dolly

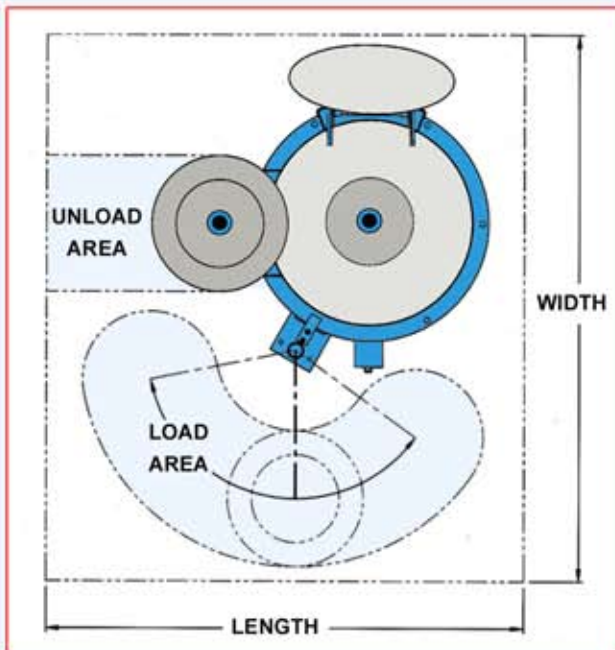

Typical operating area

Centrifuge Model . . . . .	401-E	1100-E
Machine Load - Max.	225 lbs	425 lbs
Area Length . . . . .	7 feet	9 feet
Area Width . . . . .	8 feet	9 feet
Boom Height . . . . .	9 feet	9 feet



**Kine-Spin / Barrett Division - Kinefac® Corporation**  
 156 Goddard Memorial Drive Worcester, MA 01603-1260  
 Tel: 508-754-6891 Fax: 508-756-5342 kinespin@kinefac.com  
 www.kinespin-barrett.com

